


SYSTEM SAVER™

INSTRUCTIONS

1. Attach SYSTEM SAVER to your Apple II as shown.

2. Disconnect your Apple II power cord. You won't need it anymore.

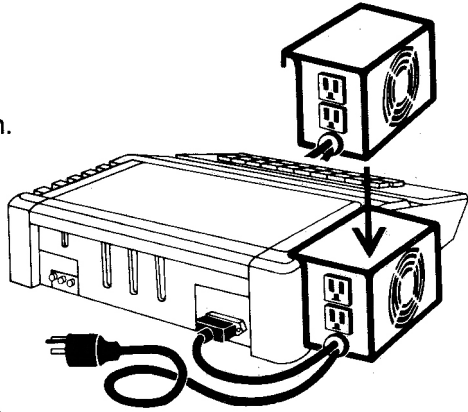

3. Plug SYSTEM SAVER's short power cord into the back of your Apple II. Plug SYSTEM SAVER's long power cord into your wall outlet. **IMPORTANT:** Leave your Apple power switch permanently on. You'll never use it again.

4. Plug your monitor and printer into SYSTEM SAVER's rear outlets.

5. You're all set! SYSTEM SAVER's front mounted switch now controls your SYSTEM SAVER, Apple II, monitor and printer.

NEED MORE?

See your local dealer or contact Kensington Microware directly for a list of dealers in your area.

Name _____

Address _____

City _____

State _____

Zip _____

Visa# _____

Exp. Date _____

MasterCard# _____

Exp. Date _____

Kensington Microware Ltd.
919 Third Avenue
10th Floor
New York, NY 10022
(212) 486-7707

 **KENSINGTON
MICROWARE**

Technical Specifications for SYSTEM SAVER

- Fan Rating: 17 CFM free air delivery
- Rated Voltage: 125 Volts AC
- Rated Current: 2 Amps for Apple, 8 Amps Total
- Temperature Range: -25°C to $+85^{\circ}\text{C}$
- Dielectric Test Voltage: 1750 Volts DC for 1 second, Line-Ground
- Capacitance Tolerance: $\pm 20\%$
- Inductance Tolerance: $\pm 25\%$
- Transient Suppression :
 - Maximum Average Power Dissipation: .6W
 - Energy Rating: 40 Joules
 - Peak Current: 4000 Amps
 - Typical Response Time: < 50 nano seconds
- Maximum Ambient Temperature: 60°C
- Filter Rating:
 - Insertion Loss: 30 dB to 50 dB
 - Effective Filter Range: 600 kHz to 20 mHz